


NOTE A
 COAXIAL CABLE TYPE RG316/U, 50 OHM
 ALPHA WIRE 9316 OR EQUIVALENT
 COLOR: TAN, BROWN, BLACK OR CLEAR

SMA RIGHT ANGLE PLUG, MALE
 NICKEL PLATING OVER BRASS
 GOLD PLATED CENTER CONTACTS

SMA STRAIGHT PLUG, MALE
 NICKEL PLATING OVER BRASS
 GOLD PLATED CENTER CONTACTS

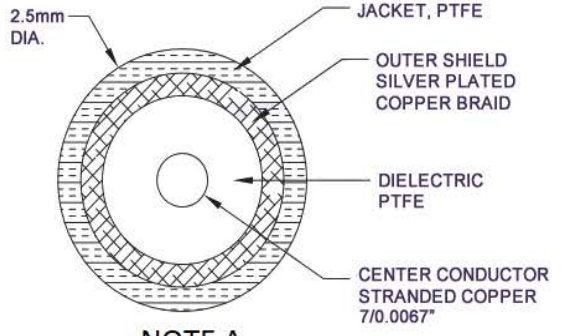

NOTE A

PART NO:	CBL-RG316U-SMA1-SMA3-XXX
-XXX	LENGTH
-002	0.2 meter
-005	0.5 meter
-010	1.0 meter
-050	5.0 meter
-100	10.0 meter

SMA CODE	DESCRIPTION
SMA1	MALE, STRAIGHT
SMA2	FEMALE, STRAIGHT
SMA3	MALE, RIGHT ANGLE
SMA4	FEMALE, RIGHT ANGLE

- Notes:
1. RATED FOR OPERATING TEMPERATURE -70 TO +200C
 2. COMPLIES WITH RoHS DIRECTIVES (2011/65/EU)
 3. APPLY LABEL AS SHOWN
 4. PACKAGE INDIVIDUALLY

APPROVED: 21-12-01

